



# FEATHER

TP7F54M  
TP7F54M(H) **108-cell**

**395 - 415W**

10BB PERC



## 体系及产品认证


- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



## 质量保证

12

25

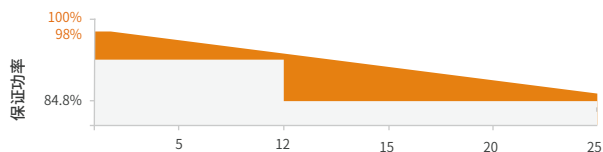

## 产品特性



重量更轻



10BB半片电池技术

2%

0.55%



显著降低热斑风险



优秀的抗PID性能

PID  
85 / 85% RH 192



IP68接线盒

		NMOT	
		294	
	5	28.8	
	81	10.23	
	5.75	34.6	3
	3.69	11.04	1
	20.20		

	10BB
	108 (6*18)
	1722*1134*30mm (67.80*44.65*1.18 )
	16.2kg (35.72lbs.)
	2.0mm
	IP68, 3 Bypass Diodes
	4mm <sup>2</sup> (IEC), 12AWG(UL) 300mm
	T01/LJQ-3-CSY/MC4/MC4-EV

	1000V/1500V/DC
	-40°C~+85°C
	FA