



# BISTAR

TP7F 60M  
TP7F 60M(H) **120-cell**

**440 - 460W**

10BB PERC



- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系




12

25

保证功率  
100%  
98%  
84.8%

5 12 15 20 25

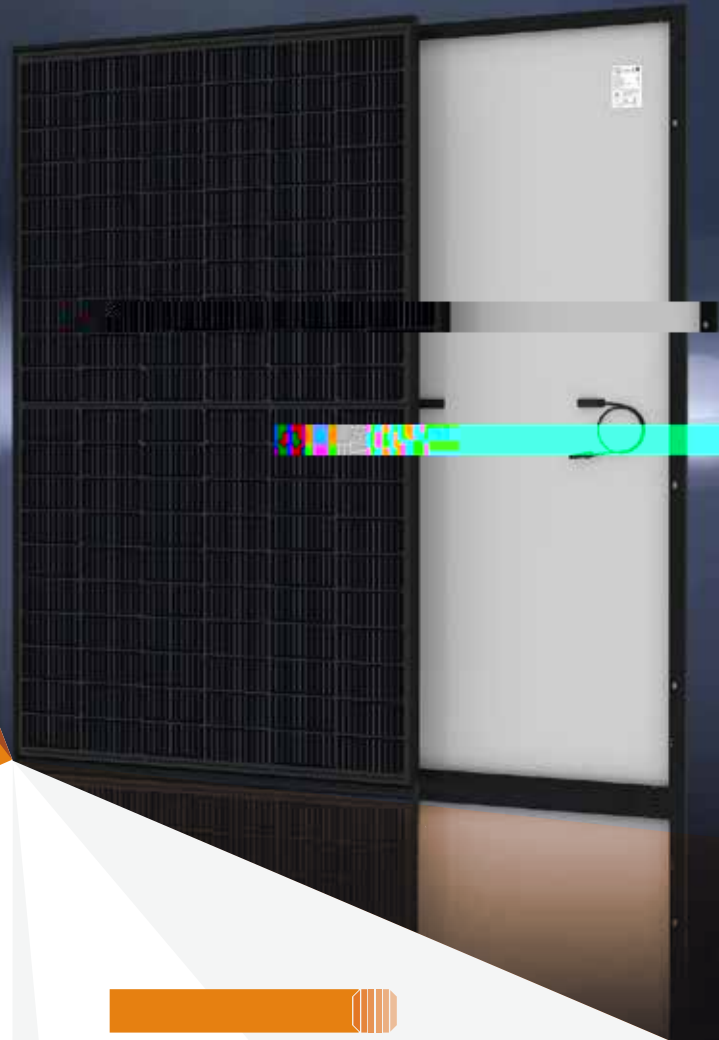

10BB

2%

0.55%



2%



PID

PID  
85 /85% RH 192




IP68

[www.talesun.com](http://www.talesun.com)

[marketing.hq@talesun.com](mailto:marketing.hq@talesun.com)

\* GL-CN-Version 2023.09.25

	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	440	328	445	332	450	336	455	339	460	343
	34.35	32.1	34.53	32.2	34.70	32.4	34.87	32.6	35.04	32.7
	12.81	10.23	12.89	10.30	12.97	10.36	13.05	10.42	13.13	10.49
	40.99	38.6	41.16	38.7	41.33	38.9	41.50	39.1	41.67	39.2
	13.69	11.04	13.78	11.11	13.86	11.17	13.94	11.24	14.02	11.30
	20.30		20.60		20.80		21.00		21.30	

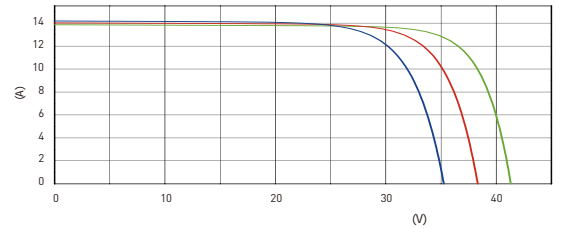	1000V/1500V/DC
	-40°C~+85°C
	25A
	Class



	31	31(USA)
	744	744

