


IPR

FD7G60M 120-cell

440 - 460l

10BB

PERC

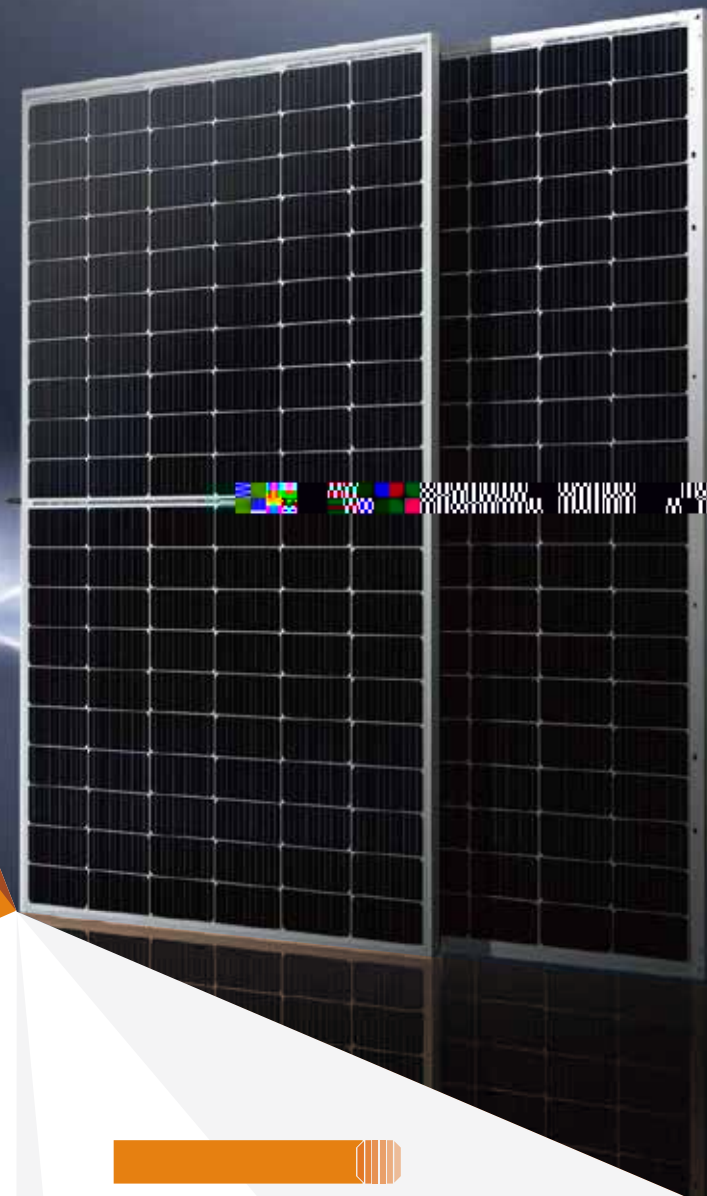


- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



12

30

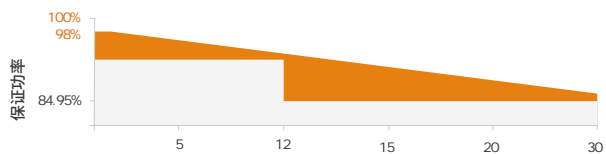

10BB

2%

0.45%



5% - 25%



PID

85 / 85% RH 192




	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	440	328	445	332	450	336	455	339
	34.35	32.1	34.53	32.2	34.70	32.4	34.87	32.6
	12.81	10.23	12.89	10.30	12.97	10.36	13.05	10.42
	40.99	38.6	41.16	38.7	41.33	38.9	41.50	39.1
	13.69	11.04	13.78	11.11	13.86	11.17	13.94	11.24
	20.30		20.50		20.70		21.00	

	5%	10%	15%	20%
	467	490	512	534
	34.53	34.53	34.53	34.53
	13.53	14.18	14.82	15.47
	41.16	41.16	41.16	41.16
	14.47	15.16	15.85	16.54

	10BB
	120 (6*20)
	1914*1134*30_ _ (75.35*44.65*1.18)
	26.8] Y (59.1Te)
	2.0_ _
	2.0_ _
	IP68, 3
	4_ _ , (IEC), 12AI G(GL)
	300_ _
	F01/LJQ-3-CEK/MC4/MC4-EHO2

	1500H/DC
	-40, Cp+85, C
	30A
	C:See
	5400PS 2400PS
	70% <i>f</i> 5%

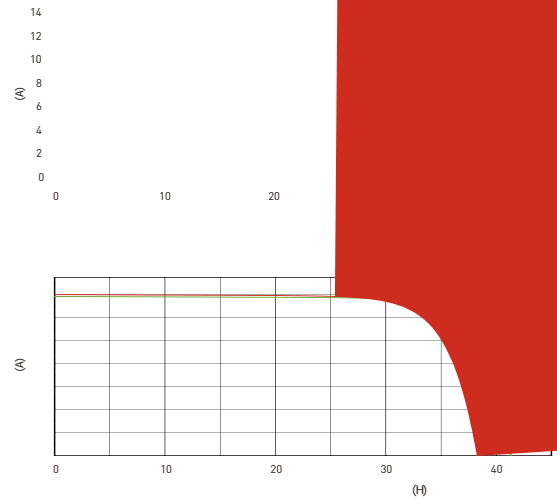

	36	36(GEA)
	864	684