



BIPRO

TM7G72M **144-cell**

570- 590W

16BB N



体系及产品认证


- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018



质量保证

12

30

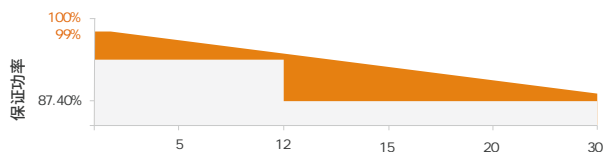

产品特性



16BB半片电池技术

LID/LeTID
1% 0.4%



行业领先的发电效率增益

TOPCon LCOE



抗PID和低辐照度性能优异

192 PID




更广泛的应用性

	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	22.10		22.30		22.50		22.60		22.80	

	5%	10%	15%	20%	25%
	609	638	667	696	725
	42.66	42.66	42.66	42.66	42.66
	14.28	14.96	15.64	16.32	16.99
	51.47	51.47	51.47	51.47	51.47
	14.96	15.68	16.39	17.10	17.81

	N	16BB
	144	(6*24)
	2278*1134*30mm (89.69*44.65*1.18)	
	[REDACTED]	
	2.0mm	
	2.0mm	
	IP68, 3	
	4mm ² (IEC), 12AWG (UL) 350mm(+), 250mm(-)	
	T01/LJQ-3-CSY/MC4/MC4-EVO2	

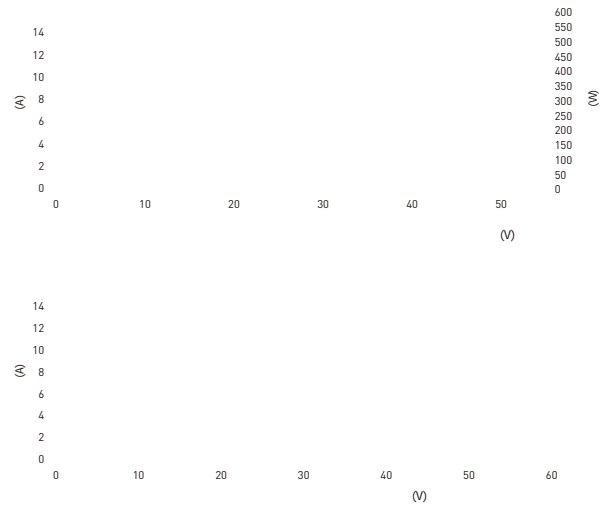

	1500V/DC
	-40°C~+85°C
	30A
	Class
	5400Pa 2400Pa
	80%± 5%

	36	36(USA)
	720	576

